

**EMAIL: SALES@UKROLLERSHUTTERS.CO.UK** 

#### **ALU-T77 INSULATED ALUMINUM SHUTTER**

ALU-T77



#### **PRODUCT DESCRIPTION**

Our ALU-T77 models come insulated which make them the perfect product for customers who want to save on energy bills or reduce sound pollution. Essentially the bigger, more secure version of our ALU-T55, they are typically used as garage doors and consequently we are pleased to offer a range of standard colours.

#### **IDEAL USES**

- Shop fronts
- Warehouses
- · Garage doors
- Over large domestic windows

#### **KEY FEATURES**

- Offers medium to high security
- More lightweight than a steel shutter meaning less energy is required to open them.
- Available in 18 standard colours, and can also come in 4 wood laminate finishes for an extra charge.

#### **TECHNICAL SPECIFICATIONS**

#### **Applications**

Medium security domestic and low - medium commercial sites. up to 16m². Note: The ALU-T77 Model can be upgraded to "Secure by Design' status - LPS1175 SR1.

#### **Curtain Slat**

Aluminium double-skinned polyester powder coated slat with polyurethane foam insulating core.

Blind Surface: 77mm



**EMAIL: SALES@UKROLLERSHUTTERS.CO.UK** 

Weight per m<sup>2</sup>: 5.5kg

Maximum Width: 5500mm (as standard - larger sizes are available)

Maximum Surface area: 16m<sup>2</sup> (as standard - larger sizes are available)

#### **Enclosure**

Manufactured from roll formed aluminium with a stove-enamelled finish.

End caps are pressure moulded aluminium alloy.

#### **Guide Channels / Bottom Slat**

Extruded aluminium with weather seal.

Guide channels depths are 70mm, 90mm or 150mm. Channel depth will be suited to overall width of the shutter.

#### Finish

Available in 18 standard colours, and can also come in 4 wood laminate finishes for an extra charge. See Colour Options in Downloads tab below.

#### **Operation**

Electric: Single phase tubular motor w wall switch as standard. Numerous options such as group or remote control etc, Manual override facility as required.

Note: Manual operation is available but not common as it is utilised for larger areas In most cases.

Garage Door variants complete with remote control, safety feature and manual override.

#### **OPTIONS AND VARIATIONS**

#### **Operation/Controls**

#### Electric

(Not all options are available on all size shutters)

Key switch

Radio/remote Control



EMAIL: SALES@UKROLLERSHUTTERS.CO.UK

Rocker switch

Timer closing

Loop and Radar operation

Smart phone

Swipe Card activation

#### **Manual**

Not available

#### Lath Design

A more cost effective 55mm alternative is available for smaller apertures. Please see our ALU-T55.

#### **Finishes**


Available in 18 standard colours, and can also come in 4 wood laminate finishes for an extra charge. See Colour Options in Downloads tab below.

#### **Accreditations**


Can be upgraded to LPS1175 SR1 for an additional cost.

#### **ILLUSTRATIONS**



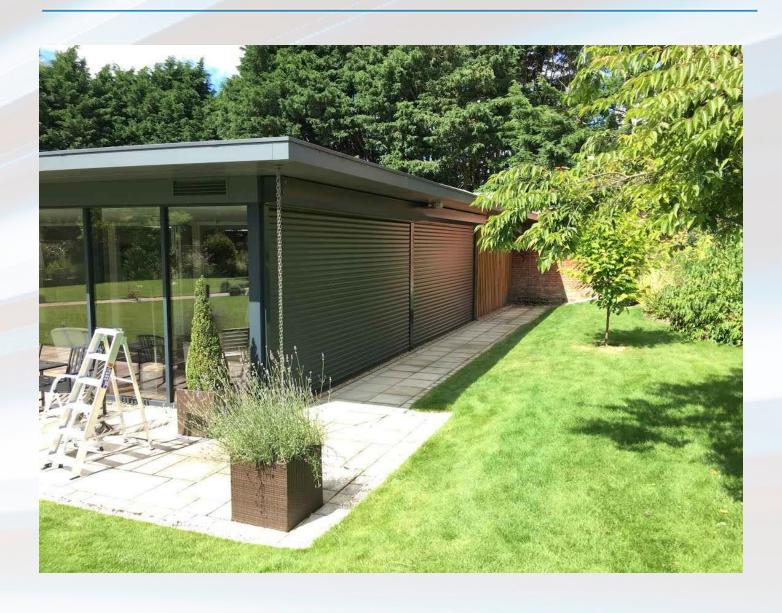




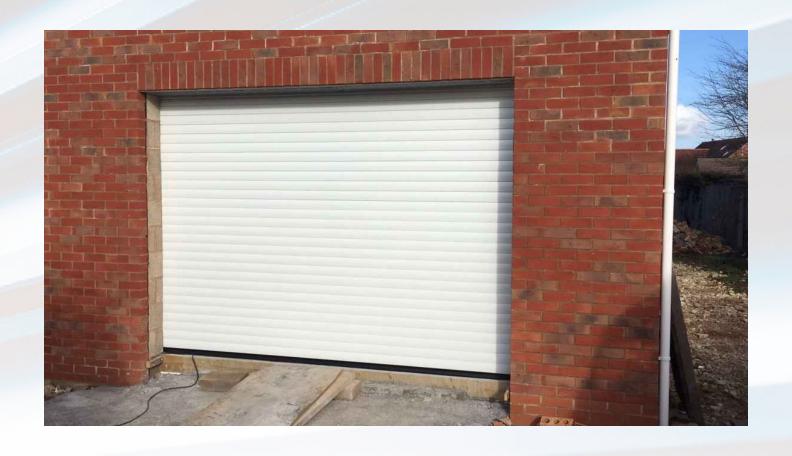








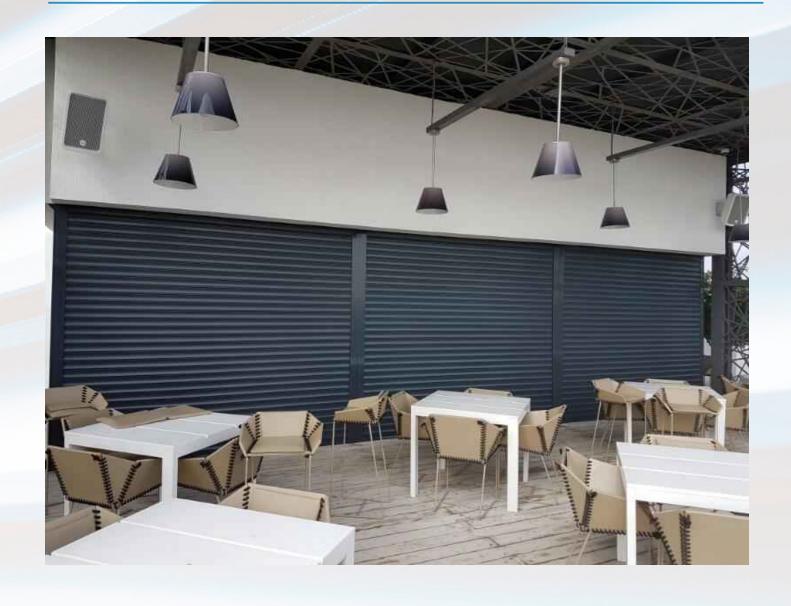



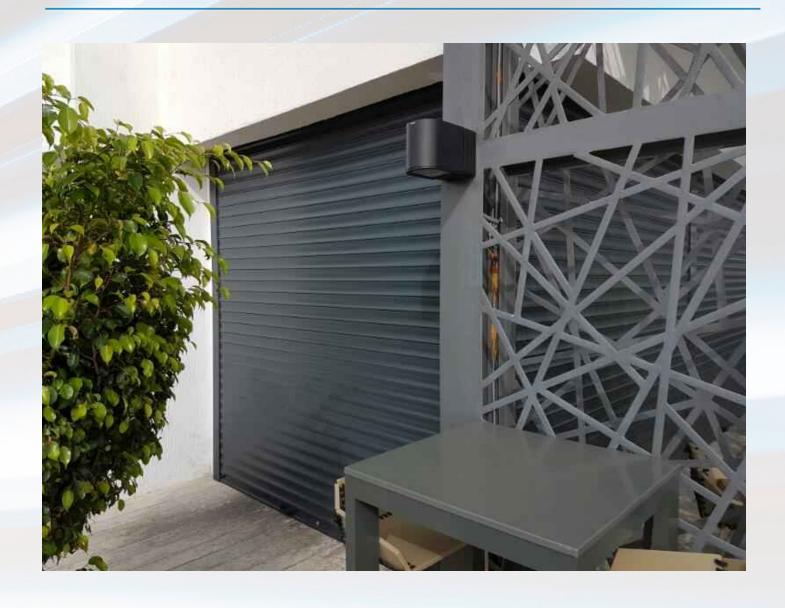

## ALU-T77Model

## Applications

Medium security domestic & low - medium commercial sites, up to 16Ma Note: The ALU-177/Model can be upgraded to "Secure by Design" status - LPS 1175 SR1.

## Curtain Slat

Aluminium double-skinned polyester powder coated slat with polyurethane foam insulating core.

Standard colours: White, Brown, Beige, Blue, Red, Green, Yellow, Black, Light Grey, Metallic Silver, Wood effect.

Blind Surface: 77mm

Weight per m2 5.5kg

Maximum Width 5500mm

Maximum Surface 16m2

### Enclosur

Manufactured from roll formed aluminium with a stove-enamelled finish.

End caps are pressure moulded aluminium alloy.

Shutter Height Box Size (mm) (up to mm)

## Guide Channels / Bottom Slat

# Extruded aluminium with weather seal.

Guide channels depth is 90mm, 70mm or 150mm.

Standard colours White or Brown Other colours available of

Standard colours White or Brown. Other colours available on request.

### Operation

Electric: Single phase tubular motor & wall switch as standard. Numerous options such as group or remote control etc. Manual override facility as required.

Note: Manual operation is available but not common as it is utilised for larger areas in most cases.

Garage Door variants complete with remote control, safety feature and manual override.

