

GLV-11INS100 Insulated Security Shutter

Applications

High security commercial sites requiring large aperture coverage, and improved insulation properties from the shutter.

Curtain Slat

Double skinned polyester powder coated 100mm Flat slat with polyurethane foam insulating core.

Perspex windows can be incorporated as required.

Standard galvanised finish.

N.B. Colour finishes available on request. Plastisol range or polyester powder coated.

Profile Height	100mm
Weight per m2	16.5kg
Maximum Width	12,000mm
Maximum Surface	50M ²

Housing

Manufactured from 0.7mm or 0.9mm galvanised steel sheet.

End caps are fabricated from 3mm steel.

Standard galvanised finish. Other colours available on request.

Guide Length Box Size

(up to mm)	(mm)
2600	400
3500	450
4500	510

N.B. The above enclosure sizes are based on standard 3-phase motor operation.

Guide Channels / Bottom Slat

Galvanised steel bottom slat with EPDM weather seal.

Guide channel depth is 85mm as standard.


Standard galvanised finish. Other colours available on request.

N.B. The guide channels are bolted to fixing angles or box section to suit the application.

Operation

Electric: Single phase tubular motor or 3-phase outboard motor (dependent on curtain weight) with push button control. Numerous options such as group or remote control etc available as required. Manual override facility as required.

CE compliant to all applicable directives and regulations.

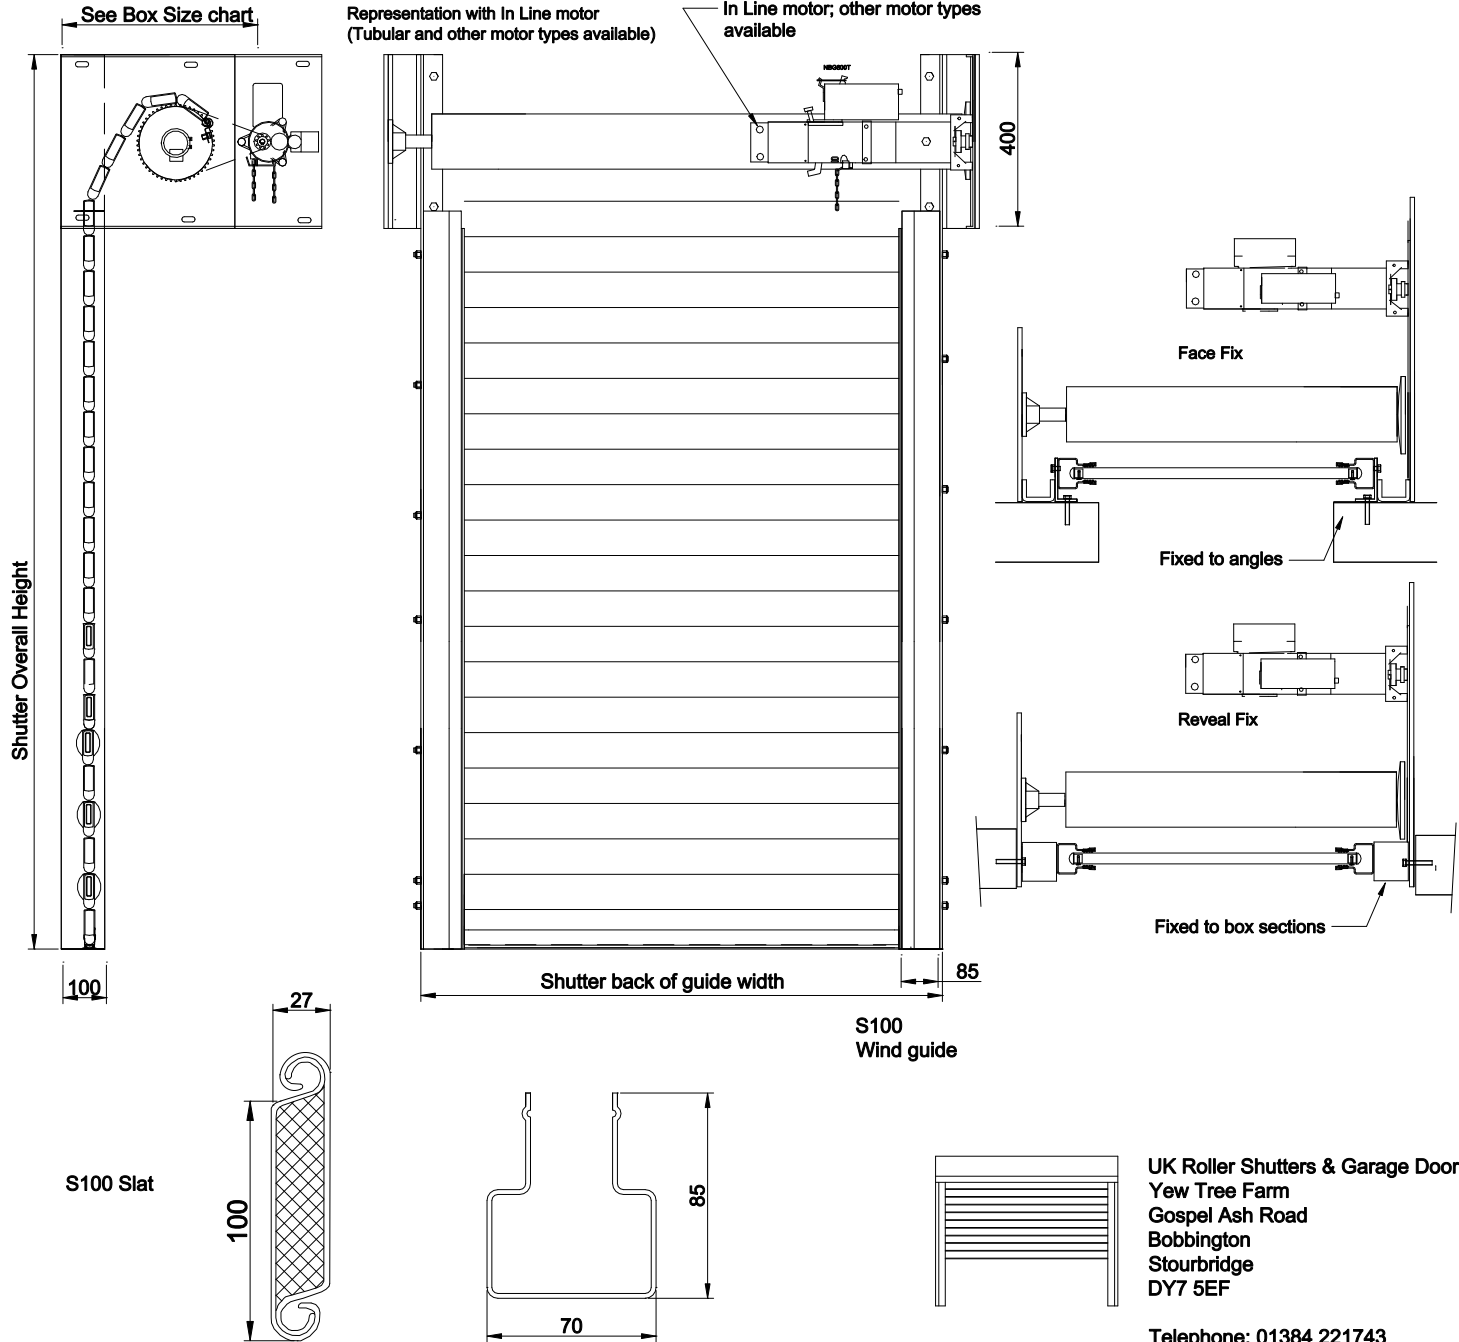

UK Roller Shutters & Garage Doors
 Yew Tree Farm
 Gospel Ash Road
 Bobbington
 Stourbridge
 DY7 5EF

Telephone: 01384 221743