

ALU-1237 Security Shutter

Applications

High security domestic and commercial sites, up to 9m². The ALU-1237 rolling shutter is a robust and lightweight barrier which is concealed within a compact enclosure when fully open. It is ideal for window openings and pedestrian door entrances, either internally or externally mounted. The ALU-1237 can be upgraded to insurance approved, Secure by Design status - LPS1175, SR1. (See: ALU-1237 Shutter).

Punched (ALU-12PU) or Perforated (ALU-12PE) profile slats may be incorporated as required for full or partial vision. Polycarbonate inserts which infill the punched section are optional.

Curtain Slat

Double-skinned extruded aluminium.
Standard Colours: the extruded ALU-1237 profile can be powder coated any colour as standard.

Blind Surface: 38mm
Weight per m²: 7.3kg
Max width: 4000mm
Max surface: 9m²

Enclosure

Manufactured from roll-formed aluminium with a stove-enamelled finish. End caps are pressure moulded aluminium alloy.
Standard colours: all BS / RAL colours available as standard.

Shutter Height (H)	Box Size (mm)
1050	150
1535	165
1820	180
2795	205
3550	250
4700	300







Guide Channels / Bottom Slat

The extruded aluminium bottom slat is fitted with a weather seal. Guide are available with a circular surface, 25mm, 45mm, 53mm, 60mm, 68mm, or 88mm guide depths available on request. Self-packing guides are also available.

Operation

Cord. The swivel winder coils the belt when it is pulled up to a maximum weight of 20kg.
Rod and Crank. Gearing rod and crank handle winds the shutter up to a weight of 25kg.

Spring and Lock. A counter-balanced spring assembly with a key-lock bottom slat & handles up to a weight of 30kg.
Electric. Single phase tubular motor & wall switch as standard. Numerous options such as group or remote control etc. Manual override facility as required.

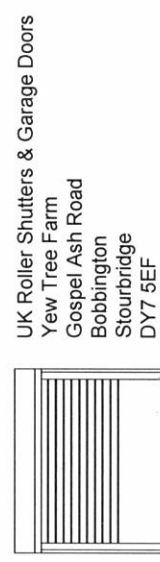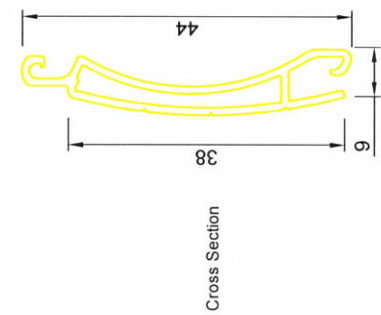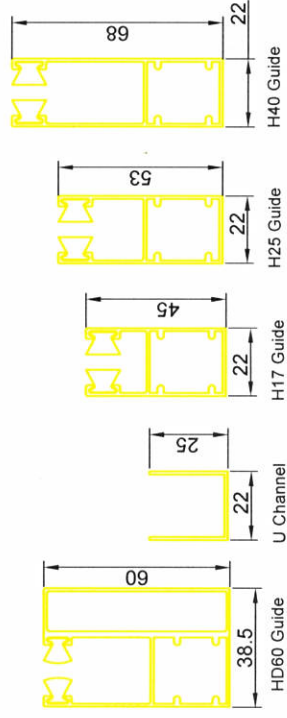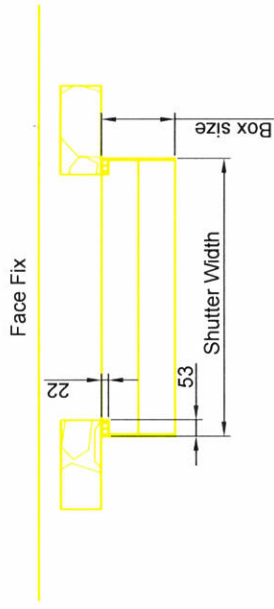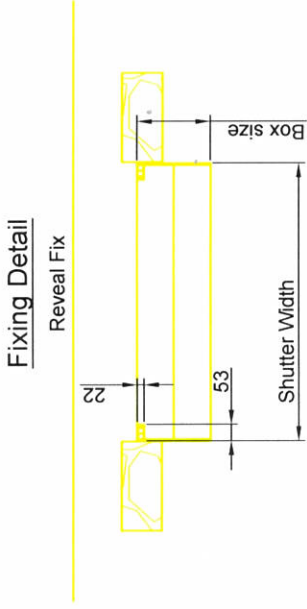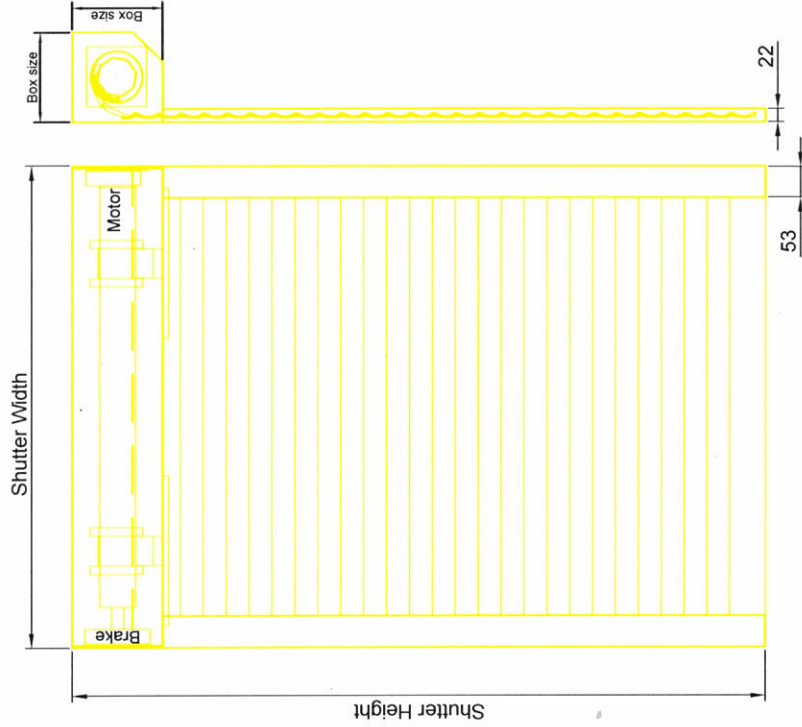

UK Roller Shutters & Garage Doors
Yew Tree Farm
Gospel Ash Road
Bobbington
Stourbridge
DY7 5EF
Telephone: 01384 221743