

FRINS-2H (EW60) Fire Shutter

With a fire resistance rating of E120 and an outstanding EW60 for radiant heat transfer, the insulating core significantly reduces the chances of heat passing through the shutter, thereby lowering the risk of a secondary fire igniting on the opposite side.

When a fire alarm is triggered, the fire shutter automatically lowers through the motor and audio-visual panel's activation. Typical locations for fire protection include canteens, shopping centers, and transport hubs, while the design of the roller shutter also offers an additional level of security.

Curtain Slat

Double skinned 81mm flat steel.

Finish: Galvanised finish as standard. Option to powder coat any RAL/BS colour (surcharges apply).

Visible Face: 81mm

Weight per m²: 21kg

Maximum Width: 5000mm*

Maximum Area: 14.25m²*

*Size limitations vary dependent on motor.



Contact us



Sales@ukrollershutters.com



+44(0)1384 221 743



Unit 41 Wombourne Enterprise Park,
Bridgnorth Road, Wombourne WV5 0AL

www.ukrollershutters.com

Casing

Galvanised steel casing & end plates as standard. Reveal fix installs are supplied with a fascia as standard.

Finish: Galvanised finish as standard. Option to powder coat any RAL/BS colour (surcharges apply).

Headbox Dimensions

Guide Height (mm)	Box Size (mm)
1500	400
2500	450
3250	500
4000	550
5000	600

Plate sizes shown as a guide only and may vary.

Bottom Rail

Galvanised steel 'T' shaped bottom rail.

Guide Channels

Galvanised steel guide channels. Width of 65mm or 100mm.

Finish: Galvanised finish as standard. Option to powder coat any RAL/BS colour (surcharges apply).

Operation

Inline Motor: Single phase inline chain driven motor (three phase option available) with push button control audio-visual panel, chain override, fusible link and solenoid release.





FRINS-2H (EW60)

2 Hour Rated Insulated Fire Shutter

INLINE MOTOR

Face fit examples shown. Drawings will vary for reveal fit installations.

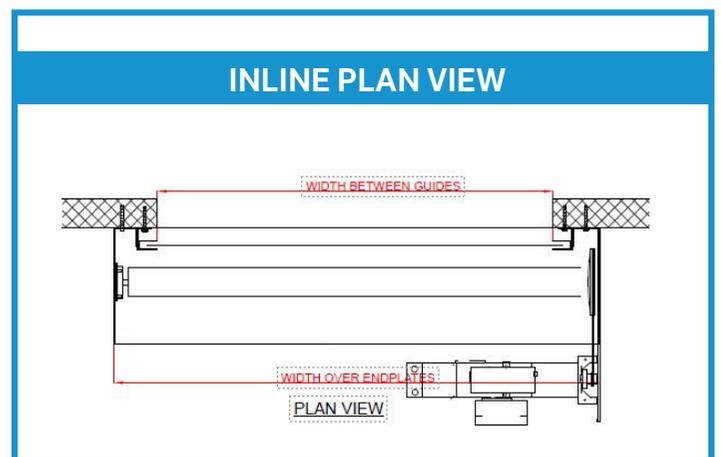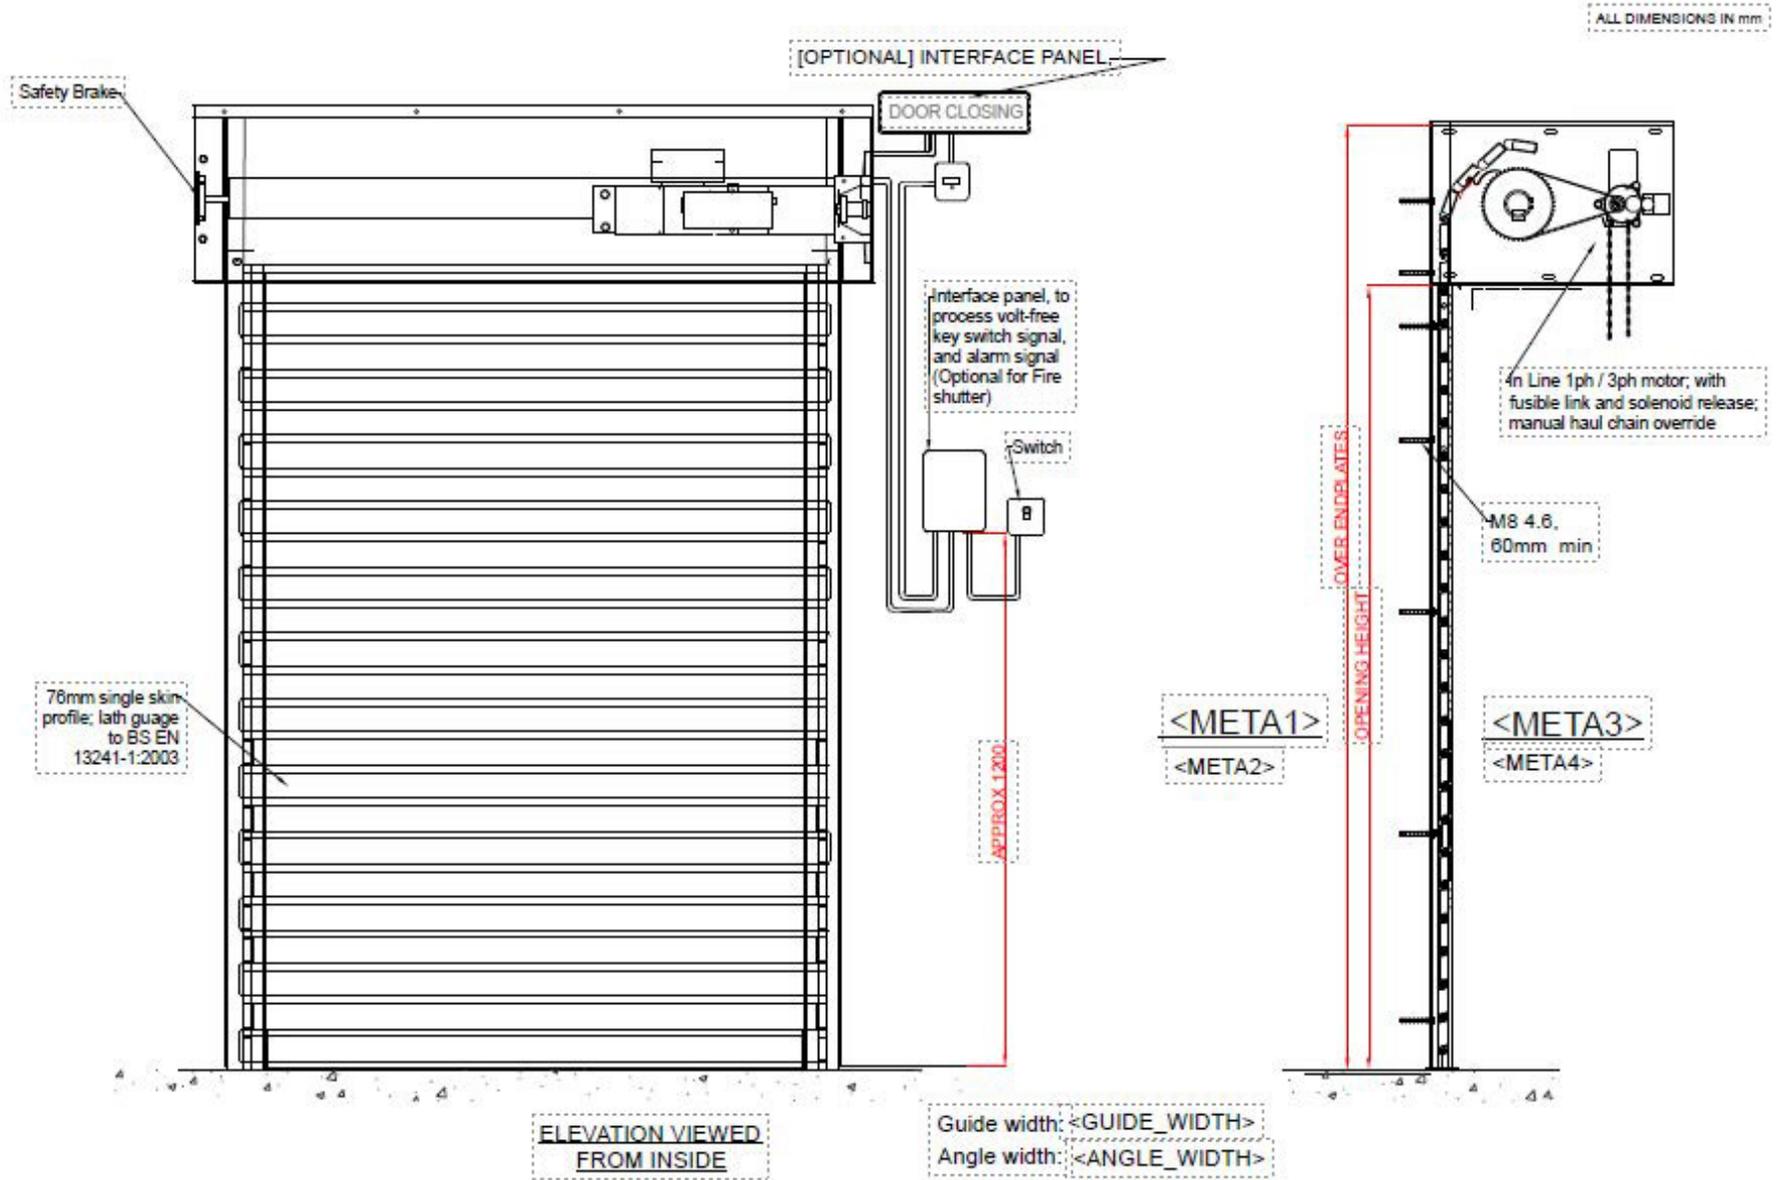

UK ROLLER SHUTTERS®
SUPPLIER & FITTER OF ROLLER SHUTTERS



Sales@ukrollershutters.com

www.ukrollershutters.com



+44(0)1384 221 743